



SEALING—INSTALL RUBBER O—RINGS OR GASKETS AROUND EACH PIPE (CASING CARRIER) TO PROVIDE CONTINUOUS WATER—TIGHT SEAL TO PREVENT EXPANSION AND CONTRACTION.

NOTE:
SLED LENGTHS TO BE 75%
OF PIPE LENGTHS

OPT: 1/2" GROUT OVER
1 FOUR INCH BRICK
COURSE AT EACH
END OF CASING

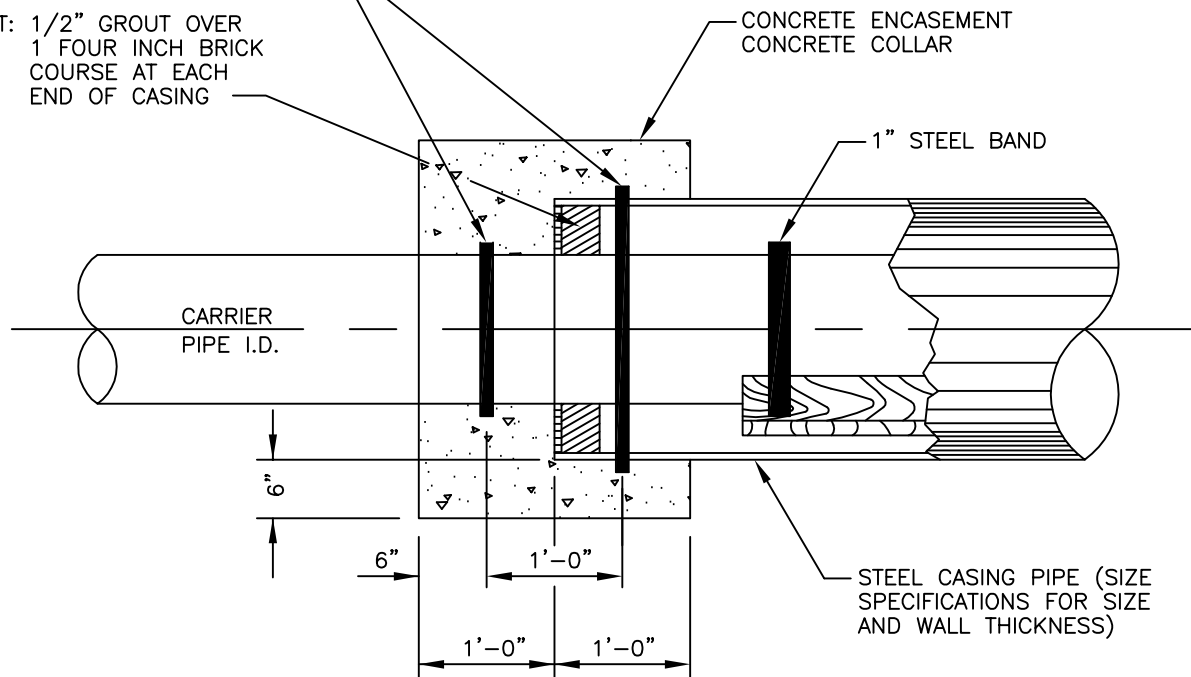

SLED

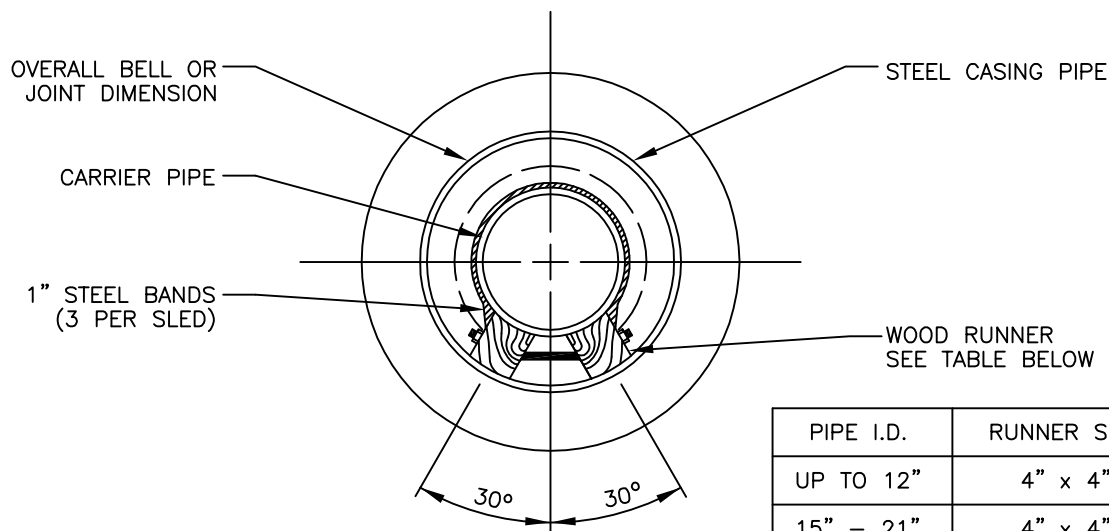

PIPE CASING DETAIL

PIPE I.D.	RUNNER SIZE
UP TO 12"	4" x 4"
15" - 21"	4" x 4"
24" - 30"	4" x 6"



CITY of DELTA
360 MAIN STREET
DELTA, CO 81416

PIPE CASING & SLED DETAIL

DATE: DEC. 1998

SHEET W24 OF 24